


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 33 TOWNSHIP 17 RANGE 5
DATE: 12-13-99
PARTY CHIEF: Kiste
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 11-1-82

IN. S.P.C. E ZONE, NAD 83
NAME: 17053308
N: 513076.5020(m)
E: 74338.4724(m)

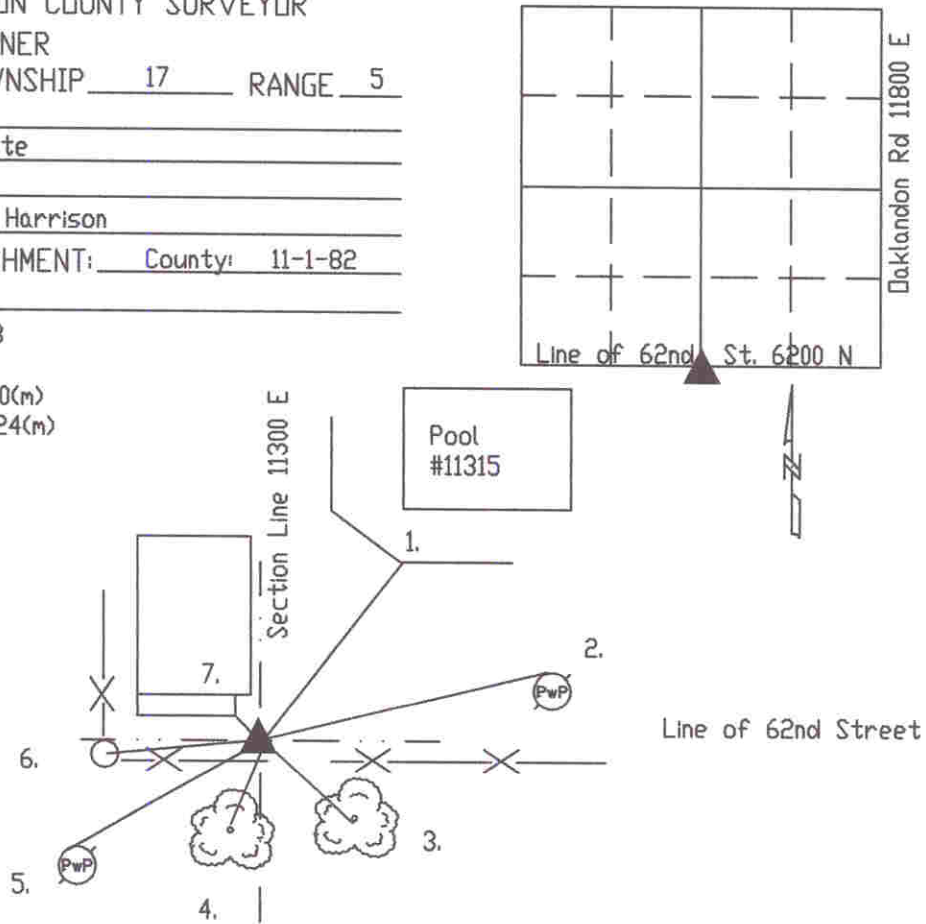

Original post set 1821 by Laughlin with witnesses: 10' ash S 60 W 2 links, 10' beech N 45 E 8 links. Legal in 5-1877 by Fatout per Lawrence Township Legal Survey Book pg. 40 gives distances across the South line of the section, but does not give any distance to the corner, itself. Same party owned the land E & W of the corner and the SW and SE corners of that tract were marked, but the S Q corner apparently was not. Legal 1952-1953 by Unversaw per Lawrence Township Legal Survey Book pg 73 indicates a stone found on the Q section line 457.5' W of the N Q of Sec. 3-16-5. 5-2-1961 Monroe indicated the same cut stone found 457.6' W of N Q of 3-16-5. This same stone was referenced 5-25-1979 by Graham. Traverse by Schneider Engineering (JOB#19142) in conjunction with work done by the MCSO ofc (JOB#810048) shows that the stone indicated in '53 Legal Survey and in '61 and '79 ties is the same stone (rock) called for at the SE corner of the tract referred to above in 1877 Legal Survey. A new traverse of the S line of 33-17-5 was run and a line was computed from the SE corner of 33-17-5, through said stone to establish the S line of the SE Q of Sec. 33. S Q corner was computed to be on said line between SW & SE of Sec. 33. This is in agreement with 1877 Legal Survey showing stone to be on the Q line. Harrison set. Re-tied 12-13-99 by Kiste.

HC753308

REF.	DISTANCE	DESCRIPTION
1.	51.13'	Corner of concret patio for ADDRESS 11315
2.	81.72'	PK nail N PwP#206-321 36'up
3.	33.74'	Mag nail w/washer S 12' ash 36'up
4.	16.23'	Mag anil w/washer center 8' stump
5.	46.00'	Mag nail w/washer NW PwP#218-321E 40'up
6.	20.00'	Face of steel fence post
7.	4.39'	SE corner of concrete salb for metal shed